


# Leyard CarbonLight

## CLM10.4

### Mesh LED System

The Leyard® CarbonLight™ CLM Series is a line of see-through mesh LED displays designed for rental and staging and flexible-fixed applications in indoor and outdoor environments. Available in 6.9 and 10.4mm pixel pitches, the Leyard CarbonLight CLM Series is lightweight with high transparency and low wind resistance.

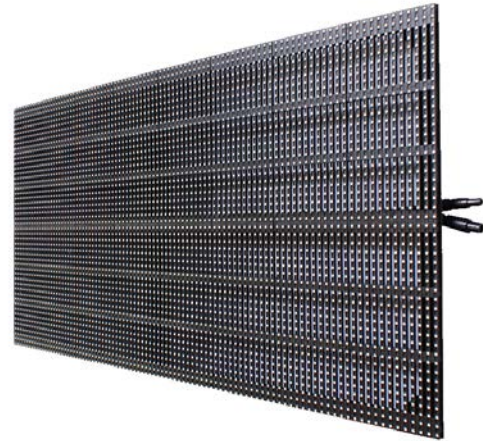

SPECIFICATION	DETAIL
Part Number	999-CLM104
Product Name	CLM10.4
Pixel Pitch	10.4mm
Resolution	96x48
Pixel Density	9,216 / sq m   856 / sq ft
LED Cabinet Size (W x H x D)	500 x 1000 x 45mm   19.69 x 39.37 x 1.77in
Cabinet Diagonal	1118mm   44in
Cabinet Area	0.5 sq m   5.38 sq ft
Modules/Cabinet (W x H)	1 x 8
Module Size	500 x 125mm   19.69 x 4.92in
Power Consumption, Maximum (watts)	300 / Cabinet   600 / sq m   56 / sq ft
Power Consumption, Typical (watts)	150 / Cabinet   300 / sq m   28 sq ft
Line Voltage	100-240V AC, 50/60Hz
Cabinet Weight (per display)	5.2kg   11.46lb
Cabinet Weight (per m <sup>2</sup> )	10.4kg   22.9lb
Brightness Max (cd / sq m)	5000
Contrast Ratio	2000:1

<b>LED Refresh Rate</b>	4000Hz
<b>Color Temperature, Adjustable (k)</b>	6500
<b>Viewing Angle, Horizontal</b>	140°
<b>Viewing Angle, Vertical</b>	140°
<b>Video Inputs</b>	DVI, HDMI, HD-SDI (to VSP)
<b>Video Input Resolution Maximum</b>	1920 x 1080 @ 60Hz
<b>Frame Rate</b>	30Hz~70Hz
<b>Control Input Type</b>	CAT6 Ethernet
<b>Service Access</b>	Rear
<b>Lifetime: Typical</b>	75,000 hrs
<b>Environmental</b>	Indoor, Outdoor
<b>Power Supply</b>	Dual (Redundant)
<b>Protection</b>	IP65
<b>Acoustic Noise</b>	Fanless Operation
<b>Operating Temperature/Humidity (degrees F/C, relative humidity)</b>	-20° to 40° C   -4° to 104° F
<b>Storage Temperature/Humidity (degrees F/C, relative humidity)</b>	-20° to 50° C   -4° to 122° F
<b>Regulatory Compliance</b>	FCC Class A, CE, UL recognized component
<b>Installation, Service</b>	Hanging, Standing
<b>Weight Bearing Capacity (per panel)</b>	1000kg   2204lb
<b>Cabinet Material</b>	Carbon Fiber
<b>Grey Scale</b>	14bit